

TOPCON INSTRUCTION MANUAL ROTATING LASER RL-H3C

Thank you for purchasing the TOPCON RL-H3C Rotating Laser. The RL-H3C instrument has many unique features. For basic operation, rough level the instrument and press power switch. It will self-level, then emit a rotating laser beam.

For superior product performance, please read these instructions carefully and keep them in a convenient place for future reference.

GENERAL HANDLING PRECAUTIONS

Before starting work or operation, be sure to check that the instrument is functioning correctly with normal performance.

When storing the instrument for long period, remove the batteries.

Always make sure instrument is dry before putting it in the carrying case. Never store a damp instrument.

DISPLAY FOR SAFE USE

In order to ensure the safe use of this product, prevent any danger to the operator or others, or damage to property, important warnings are placed on the product and inserted in the instruction manual. We recommend that you become familiar with the meaning of these Warnings and Cautions before continuing.

STANDARD PACKAGE COMPONENTS

Upon opening, make sure that all the followings are included.

- 1 RL-H3C Instrument 1set
- 2 LS-70B/70C* Laser Sensor 1set
- 3 Size "C" dry batteries (R14PU) 4pc.
- 4 9 volt dry battery (6F22/S-006P) 1pc.
- 5 Carrying case 1pc.
- 6 Instruction manual 1vol.
- 7 Model-6 Laser Sensor Holder 1pc.

* LS-70B is included for some markets instead of LS-70C.

SAFETY CAUTIONS

Display	Meaning
WARNING	Ignoring or disregard of this display may lead to the danger of death or serious injury.
CAUTION	Ignoring or disregard of this display may lead to personal injury or physical damage.

•Injury refers to hurt, burn, electric shock, etc.
•Physical damage refers to extensive damage to equipment and structure or furnishings.

WARNING
• There is a risk of fire, electric shock or physical harm if you attempt to disassemble or repair the instrument yourself. This is only to be carried out by TOPCON or an authorized dealer, only !
• May ignite explosively. Never use an instrument near flammable gas, liquid matter, and do not use in a coal mine.
• Cause eye injury or blindness. Do not stare into beam.
• Risk of fire or electric shock. Do not use a wet battery.
• Battery can cause explosion or injury. Do not dispose in fire or heat.
• The short circuit of a battery can cause a fire. Do not short circuit battery when storing it.

CAUTION
• Use of controls or adjustment or performance of procedures other than those specified herein may result in hazardous radiation exposure.
• Do not stand or sit on the carrying cases. It could overturn, causing injury.
• Do not use a damaged instrument case. It could accidentally open causing damage to the instrument or injury to people.
• Do not place yourself or a reflecting object in the path of the laser beam. If using the laser outside, avoid positioning it anywhere near eye level to avoid any possibility of it striking someone in the eye. If this should happen, visibility could be temporarily impaired, causing disorientation and possible accidental injury.
• Please note that the tips of tripod can be hazardous, be aware of this when setting up or carrying the tripod.
• Do not allow skin or clothing to come into contact with acid from the batteries, if this does occur then wash off with copious amounts of water and seek medical advice.
• Do not place instrument on unstable platform, surface or tripod. If using tripod, make sure instrument is securely attached.
• Risk of injury by falling down a tripod and an instrument. Always check that the screws of tripod are tightened.

Exceptions from Responsibility

- The user of this product is expected to follow all operating instructions and make periodic checks of the product's performance.
- The manufacturer, or its representatives, assumes no responsibility for results of a faulty or intentional usage or misuse including any direct, indirect, consequential damage, and loss of profits.
- The manufacturer, or its representatives, assumes no responsibility for consequential damage, and loss of profits by any disaster, (an earthquake, storms, floods etc.), fire, accident, or an act of a third party and/or a usage in other than usual conditions.
- The manufacturer, or its representatives, assumes no responsibility for any damage, and loss of profits due to a change of data, loss of data, an interruption of business etc., caused by using the product or an unusable product.
- The manufacturer, or its representatives, assumes no responsibility for any damage, and loss of profits caused by usage other than explained in the user manual.
- The manufacturer, or its representatives, assumes no responsibility for damage caused by wrong movement, or action due to connecting with other products.


Laser Safety

This product uses a visible laser beam, and is manufactured and sold in accordance with "Performance Standards for Light-Emitting Products" (FDA/BRH 21 CFR 1040) or "Radiation Safety of Laser Products, Equipment Classification, Requirements and User's Guide" (IEC Publication 60825-1) provided on the safety standards for laser products.

As per the said standard, this product is classified as a "Class II Laser Product" or "Class 2 Laser Product".

This is a simple product to operate and does not require training from a laser safety officer.

In case of any failure, do not disassemble the instrument. Contact TOPCON or your TOPCON dealer.

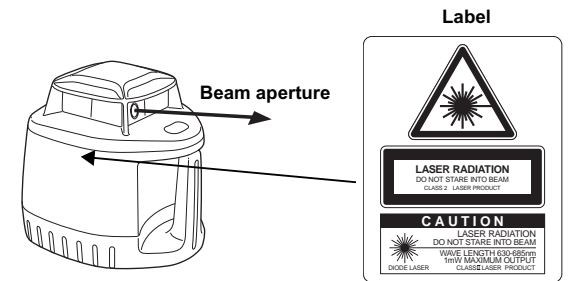

NOMENCLATURE AND FUNCTIONS

Manual mode ON (Red LED)

Auto leveling does not function.

Height alert OFF (Red LED)

Height alert does not function.

Height alert OFF switch

OFF: Push twice continuously.
ON: Push once.


Manual mode ON switch

ON: Push twice continuously.
OFF: Push once.

Handle

Height alert function (Safety lock system)

When auto-leveling and height alert function are active, after the laser beam emits for one minute, this function prevents the instrument from operating if it is disturbed. This insures accurate control. If the unit is disturbed, all lamps will blink except battery power lamp. The elevation (height of instrument) should be verified and re-established if necessary. This function is not active in the manual mode.

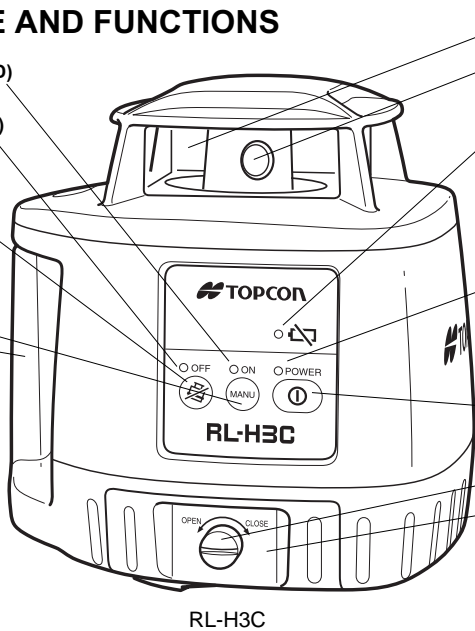

Protective glass

Rotary head
Laser beam emits from here.

Battery power (Red LED)

Blinking:
The power is low, but laser is still usable. (Blinking continues for one minute.)
On Solid:
Dead batteries. Replace the batteries with new ones. (The lamp is solid for five minutes, then turned off automatically.)

Auto leveling (Green LED)

Blinking slowly:
Auto leveling is in process.
Blinking quickly:
Auto leveling is almost complete.
On Solid:
Auto leveling is complete.

Power switch

Turn the instrument ON or OFF.

Battery door knob


Battery door

Note

In manual mode
•Auto-leveling function is not active.
•Height alert function is not active.

On-Grade Index

40mm
(1 9/16")



LS-70B/70C
(Laser Sensor)

Beam receiving window

Turn the beam receiving window side towards RL-H3C to detect the laser beam.

Indicator

Detect the on-grade position "—" by moving the Laser Sensor up and down. Directional arrows and audio signals assist in locating the on-grade position as the laser strikes the beam receiving window. (Top of Laser Sensor is 40mm (1 9/16") from on-grade index for offset marking.)

LS-70B: The indicators are located on front and back sides of the instrument.
LS-70C: The indicator is located only on front side.

On-Grade precision switch

Two on-grade precision options are available, normal precision and high precision. By pressing this switch, the precision options are switched alternately. Confirm the precision choice by the indicator. (Normal precision is the default setting each time the sensor is turned on. See LS-70B/70C Indicator diagram below.)

Power switch

The power switch turns ON or OFF by pressing. If the power switch is turned ON, all signs will be displayed on the indicator for a second with a beep sound.

Buzzer speaker



Volume of the sensor buzzer can be alternately switched to LOW/LOUD/OFF by pressing the switch.

Auto shut off function

The power will be turned off automatically if no laser beam is detected for approximately 30 minutes. (To turn on the laser sensor, press the power switch again.)

HOW TO OPERATE

- Set the instrument to the tripod or smooth surface.
•Make sure instrument is roughly level ($\pm 3^\circ$).
•Press power switch (ON).
- Press power switch on laser sensor (ON).
•Select the precision mode by pressing the On-Grade precision switch.
•Locate the on-grade position "—" by moving the laser sensor up and down.



When using the Laser Sensor with other select Topcon lasers, these symbols alert user if laser batteries are low or if laser has been disturbed. These symbols are not active when used with RL-H3C.

LS-70B/70C Indicator



	High precision mode
	Normal precision mode
	Above grade indicator Move the sensor down. Audio signal: High pitch, frequent beep
	On-Grade position Audio signal: Continuous beep sound
	Below grade indicator Move the sensor up. Audio signal: Lower pitch, slower frequency
	Battery remaining display



EXAMPLES OF TYPICAL USE



Using Laser Sensor On Rod

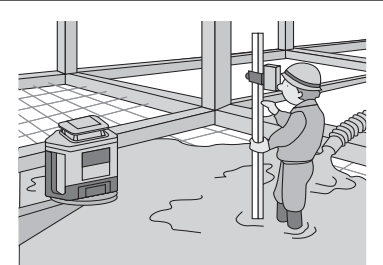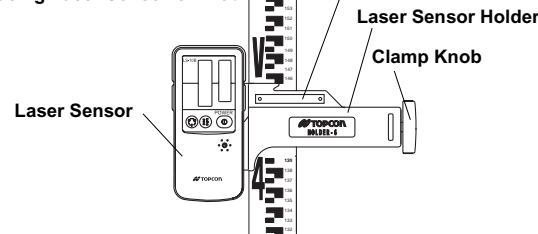


BATTERY REPLACEMENT

RL-H3C


- 1 Remove the battery cover by turning battery cover knob to "OPEN" side.
- 2 Remove the batteries by pulling out the slide plate.
- 3 Install the new batteries referring to the illustration on the battery cover.*1, *2, *3
- 4 Install the battery cover. By using a coin, tighten the battery cover knob to "CLOSE" side until the knob does not turn.*4

*1 Replace all 4 batteries with new ones at the same time. Do not mix used and new batteries, and do not mix different types of batteries together.
 *2 Use alkaline dry cells. (Dry cells for movement confirmation are packed in shipment.) Nickel hydrogen dry cells and nickel cadmium dry cells can be used too, but the operating time is different from the time of alkaline dry cells.
 *3 Generally, performances of dry cell deteriorate temporarily in low temperature, but recover in normal temperature.
 *4 It is important to use a coin or other tool to make sure cover is firmly closed to seal out water.

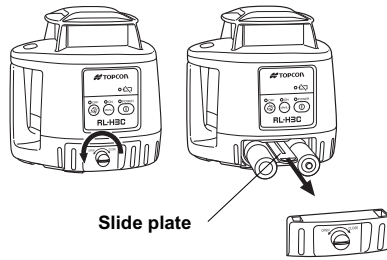

Laser Sensor

- 1 Press the lid in the direction of the arrow to lift.
- 2 Remove the battery and replace with a new 9v alkaline battery.
- 3 Press the lid down and click to close.




CHECKS AND ADJUSTMENTS

1 Checking and adjusting calibration

Horizontal calibration of the laser beam can be checked by the user.

[Checking]

- 1 Set up a tripod approx. 50m (160ft) from a wall. Mount the instrument on the tripod, facing the X1 side toward the wall.
- 2 Turn the instrument on and allow auto-leveling to complete.
- 3 Put the laser sensor in fine detection mode by pressing the On-Grade precision switch.
- 4 By using the laser sensor, mark the center position of laser beam on the wall. (X1)
- 5 Turn off the instrument. Loosen the tripod screw, rotate the instrument 180 degrees and re-secure it on the tripod. The X2 side of the instrument faces toward the wall. When rotating the instrument, avoid changing the height.
- 6 Turn the unit on again and allow auto-leveling to complete.
- 7 By using the laser sensor, mark the center position of laser beam on the wall. (X2)
- 8 If the difference value of marked two laser beam heights (difference value of X1 and X2) are less than 7mm, adjustments are not needed. The difference value is greater than 7mm, adjust the instrument as described in right. *
- 9 Check the X1 (handle) side as the same way.

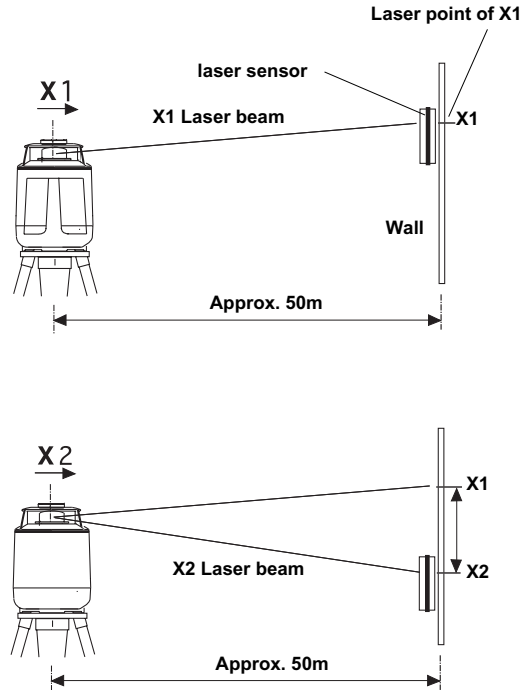

[To calibrate the X axis]

- 1 Face the X1 side of the instrument (panel side) toward a wall, press the Power switch while pressing the height alert OFF switch. Then the height alert OFF lamp will light, and manual mode ON lamp will blink.
- 2 Press the height alert OFF switch to calibrate the X axis. The manual mode ON lamp will light. When auto-leveling finishes, the laser beam will emit.
- 3 Using the laser sensor, mark the on-grade height of laser beam on a wall.
- 4 Rotate the instrument 180 degrees to face X2 side toward a wall.
- 5 In the same way as step 3, mark the on-grade height of laser beam on a wall.
- 6 By pressing the manual mode ON switch (laser beam moves up), or Power switch (laser beam moves down), adjust the on-grade height of the beam until it is precisely centered between the marks made in steps 3 and 5.
- 7 Press the height alert OFF switch to memorize the new laser beam calibration. The height alert OFF lamp will blink. Power will shut off automatically when the calibration memorization is complete.


[To calibrate the Y axis]

- 1 Face the Y1 side of the instrument (handle side) toward a wall, press the Power switch while pressing the height alert OFF switch. Then the height alert OFF lamp will light, and manual mode ON lamp will blink.
- 2 Press the Power switch again. The auto leveling lamp will light.
- 3 Press the height alert OFF switch to calibrate the Y axis. The auto leveling lamp will light.
- 4 Using the laser sensor, mark the on-grade height of laser beam on a wall.
- 5 Rotate the instrument 180 degrees to face Y2 side toward a wall.
- 6 In the same way as step 4, mark the on-grade height of laser beam on a wall.
- 7 By pressing the manual mode ON switch (laser beam moves up), or Power switch (laser beam moves down), adjust the on-grade height of the beam until it is precisely centered between the marks made in steps 4 and 6.
- 8 Press the height alert OFF switch to memorize the new laser beam calibration. The height alert OFF lamp will blink. Power will shut off automatically when the calibration memorization is complete.

To discontinue calibration the instrument, press the Power switch while pressing the height alert OFF switch.


When calibration is memorizing, if the height alert lamp continues to blink quickly and power does not shut-off automatically, please contact your local Topcon dealer.

*If the difference value is greater than 60mm (2 3/8 inches), contact your Topcon dealer.



2 Checking cone error

Perform the following check after completing horizontal calibration procedure.

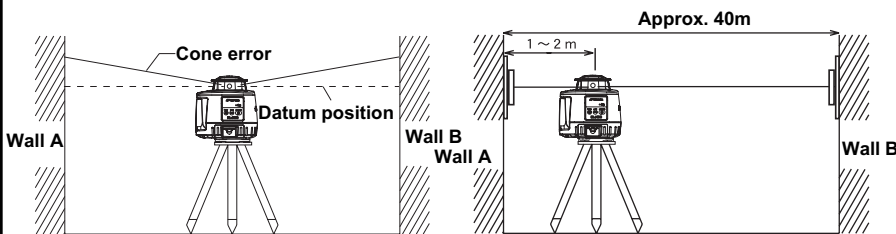


[Checking]

- 1 Set up the laser centered between two walls approximately 40m (131ft) apart. Orient the instrument so one axis, either X or Y, is facing the walls.
- 2 Locate and mark the position of the rotating laser beam on both walls using the laser sensor.
- 3 Turn off the instrument and move the instrument closer to wall A (1m to 2m / 3 ft to 6 ft). Do not change the axis orientation of the instrument. Turn the instrument on.
- 4 Again locate and mark the position of the rotating laser beam on both walls using the laser sensor.
- 5 Measure the distance between the first and second marks on each wall. If the difference between each set of marks is less than 4mm (5/32 of an inch), no error exists.

*If the difference value is greater than 4mm (5/32 inch), contact your Topcon dealer.

3 Error Code

Use the table below to determine operation errors indicated by blinking lamps on the control panel. If corrective action listed does not correct error, please contact your local Topcon dealer.



Lamp Indication	Error Code	Corrective Action
Lamp B, C and D blink in turn	Auto-leveling range error	Correct tilt of the instrument until it less than 3 degrees.
Lamp A lights	Battery power error	Replace all 4 batteries with new ones at the same time.
Lamp B, C and D blink simultaneously	Height alert error	Turn power off, rough level the instrument, then turn power on again. Check height of laser beam as it may have changed.
Lamp D blinks quickly	Calibration error	Repeat calibration procedure. If error repeats contact your local Topcon dealer.
Lamp A, B, C and D blink simultaneously	Internal error	Turn power off, then on again. If error repeats contact your local Topcon dealer.

STORAGE PRECAUTIONS

Always clean the instrument after use.
 Use a clean cloth moistened with neutral detergent or water.
 Never use an abrasive cleaner, ether, thinner benzene, or other solvents.
 Always make sure the instrument is completely dry before storing. Dry any moisture with a soft, clean cloth.

SPECIFICATIONS

RL-H3C		LS-70B/70C	
Accuracy	: ±3.6mm/50m (±15")	Beam detection window	: 50mm (2.0 in)
Automatic correction range	: ±3°	Beam detection precision	: High precision : ±1mm(±0.04 in) Normal precision : ±2mm(±0.08 in)
Beam detecting range	: Approx. 2m~300m diameter (6ft~980ft)	Beam detection indication	: Liquid crystal and buzzer
Rotational speeds	: 600r.p.m	Power source	: DC 9V alkaline (dry) battery
Laser source	: Laser diode (Visible, Red)	Operating time	: Approx. 80 hours at +20°C (+68°F) (Using alkaline manganese dry batteries)
Laser power output	: 0.8mW (Max.)	Auto shut-off delay	: Approx. 30 minutes without beam detection.
Laser class	: Class 2 laser product	Operating temperature	: -20°C~+50°C (-4°F~+122°F)
Power supply	: Four C size alkaline manganese dry batteries	Dimensions	: 165(L)x78(W)x26(H)mm (6.5x3.0x1.0 in)
Operating time	: Approx. 60 hours at +20°C (+68°F)	Weight	: 0.25 kg [0.55 lbs] (With dry batteries)
Protection against water and dust	: IP56 (Based on the standard IEC60529)		
Operating temperature	: -20°C~+50°C (-4°F~+122°F)		
Dimensions	: 167(L)x182(W)x189(H)mm (6.5x7.1x7.4 in)		
Weight	: 1.9kg[4.1lbs] (With dry batteries)		



TOPCON POSITIONING SYSTEMS, INC.
 5726 West Las Posas Blvd., Pleasanton, CA 94588, U.S.A.
 Phone: 925-460-1300 Fax: 925-460-1315 www.topcon.com
TOPCON CALIFORNIA
 3380 Industrial Blvd., Suite 105, West Sacramento, CA 95691, U.S.A.
 Phone: 916-374-8575 Fax: 916-374-8529
TOPCON MIDWEST
 891 Busse Road, Elk Grove Village, IL 60007, U.S.A.
 Phone: 847-736-1700 Fax: 847-734-1712
TOPCON EUROPE B.V.
 Eestebaan 11, 2206 LJ Capelle a/d IJssel, The Netherlands.
 Phone: 010-4585077 Fax: 010-4585045 www.topcon-europe.com
TOPCON BELGIUM
 Prieskakker 8, 7780 Menichem, Belgium
 Phone: 052-37.45.48 Fax: 052-37.45.79
TOPCON DEUTSCHLAND G.m.b.H.
 Weidkamp 110, 43356 Essen, GERMANY
 Phone: 0201-8619-100 Fax: 0201-8619-111 ps@topcon.de
 www.topcon.de
TOPCON S.A.R.L.
 89, Rue de Paris, 92585 Clichy, Cedex, France.
 Phone: 33-1-41069490 Fax: 33-1-47390251 topcon@topcon.fr
HEAD OFFICE
 Frederic Mompou 5, Ed. Euro 3, 08960, Sant Just Desvern Barcelona, Spain.
 Phone: 93-473-4057 Fax: 93-473-3932 www.topconsp.com
MADRID OFFICE
 Avenida Burgos, 16E, 1 28036, Madrid, Spain.
 Phone: 91-564-1129 Fax: 91-563-3890
TOPCON SCANDINAVIA A. B.
 Neungstam 2 S-43161 Malmö, SWEDEN
 Phone: 031-7109200 Fax: 031-7109249

TOPCON (GREATBRITAIN) LTD.
 HEAD OFFICE
 Topcon House Kennet Side, Bore Lane, Newbury, Berkshire RG4 1PX U.K.
 Phone: 44-1635-651120 Fax: 44-1635-651170
 survey.sales@topcon.co.uk laser.sales@topcon.co.uk
TOPCON SINGAPORE PTE. LTD.
 116, 112 Pandan Loop, Pandan Industrial Complex, #07-01, Singapore 128381
 Phone: 62780222 Fax: 62733540 www.topcon.com.sg
TOPCON AUSTRALIA PTY. LTD.
 488 Victoria Road, Glenfield, NSW 2111, Australia
 Phone: 02-9817-4666 Fax: 02-9817-4654 www.topcon.com.au
TOPCON INSTRUMENTS (THAILAND) CO., LTD.
 17162 Silom Sathon Tower, 37B, Fl.
 Krungthorbnari Rd., Klongtonn, Klongsarn, Bangkok 10600 Thailand.
 Phone: 662-441-1122 Fax: 662-445-1170
TOPCON INSTRUMENTS (MALAYSIA) SDN. BHD.
 Lot 226, Jalan Negara 2, Pusat Bandar Taman Melawati,
 Taman Melawati, 53100, Kuala Lumpur, Malaysia.
 Phone: 60-41-078901 Fax: 03-41078798
TOPCON KOREA CORPORATION
 2F Yooeung Bldg., 1595-3, Seocho-Dong, Seocho-gu, Seoul, 137-876, Korea.
 Phone: 82-2-2055-0301 Fax: 82-2-2055-0319 www.topcon.co.kr
TOPCON OPTICAL (H.K.) LIMITED
 2/F, Mescio Industrial Bldg., No. 33-55 Au Pui Wan Street, Fo Tan Road,
 Sha Tin, N.T., Hong Kong
 Phone: 2690-1328 Fax: 2690-2221 www.topcon.com.hk
TOPCON CORPORATION BEIJING OFFICE
 Room No. 902, Pida Plaza Building, 14 Dongzhimen Nandajie,
 Dongcheng District, Beijing, 100027, China
 Phone: 10-6501-4191-2 Fax: 10-6501-4190
TOPCON CORPORATION DUBAI OFFICE
 P. O. BOX 70-1002 Annulla, BEIRUT-LEBANON
 Phone: 961-4-52325761-4-523256 Fax: 961-4-521119
TOPCON CORPORATION DUBAI OFFICE
 P. O. Box 28596, 102, Al Nahd Bldg., 285 Abu Hail Road, Deira, Dubai, UAE
 Phone: 971-4-2696511 Fax: 971-4-2696272

TOPCON CORPORATION
 75-1 Hatanuma-cho, Itabashi-ku, Tokyo 174-8580, Japan
 Phone: 3-3558-2520 Fax: 3-3560-4214 www.topcon.co.jp